




# Double Hung E100

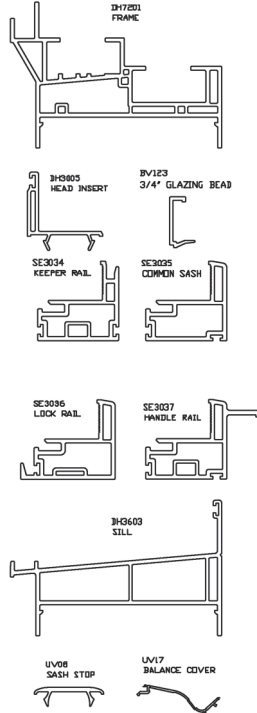

## Product Features

- Fusion welded frame and sash corners
- 3 1/4" Frame with beveled exterior
- 1/2" Trimmable leg frame
- Maintenance-free multi-chambered vinyl
- Full width overlap interlock
- Sloped Sill
- Foam-filled compression bulb at sill
- Shadow groove interior sash welds
- Multiple rows of mylar fin weatherstrip
- Integral lift rails
- Die cast cam locks and keepers
- Recessed tilt latches with ergonomic button
- Double night locks (ASTM F588-97 Grade 10 forced entry resistant)
- Stainless steel constant force balances
- Metal drop in pivot cam
- Tilt in, lift out sashes
- Full or half screen
- Aluminum screen frame
- BetterVue screen mesh
- Double (3/4") or triple (1") pane glass
- Tape glazed
- Intercept spacer system
- Limited Lifetime Warranty
- White or Tan Vinyl
- Made in USA with more than 90% domestic content

**Made in USA**



# Easton Series

### Size Limits

	Width	Height	UI*
Minimum	14"	23 3/4"	38
Maximum	52"	103"	132

MAXIMUM TRIPLE PANE SIZE 50"width x 80" height

\*United Inches = Width + Height

### Performance

Thermal Performance	NFRC		A4532.02-116-45		
	(no grids/ grids)	U-value	SHGC	VT	CR
Clear/Clear	.46/.46	.60/.54	.62/.55	43	
IntelliGlass 7036 LE/Argon	.30/.30	.30/.27	.54/.48	57	
IntelliGlass X Solar LE/Argon	.29/.29	.24/.22	.48/.42	56	
Intell Plus Triple 7138 LE/Argon	.23/.23	.26/.23	.42/.38	65	
Intell Supreme Triple 7138 LE/Krypton	.19/.19	.27/.24	.44/.39	63	

### Structural Performance

Air Infiltration@ 25MPH	.17 cfm/ft <sup>2</sup>
Water Penetration	4.50 psf
Structural Pressure	+/- 45.0 psf
Equivalent Wind	130 mph

PRODUCT RATING: R30

### Cross Sections

