




Single Hung TC700

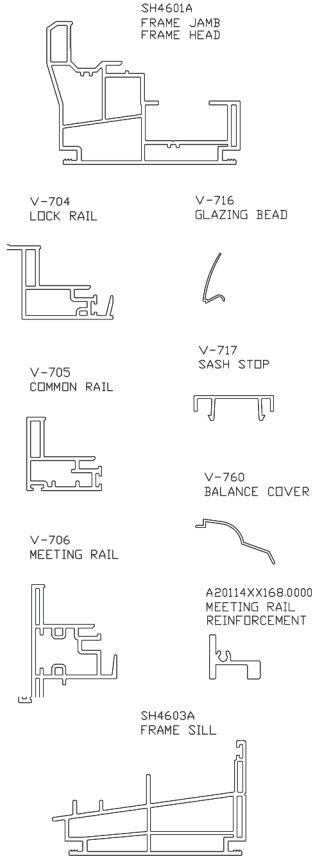

Product Features

- Fusion welded frame and sash corners
- 2 7/8" Frame with beveled exterior
- Maintenance-free multi-chambered vinyl
- Full width interlock
- Sloped Sill
- Foam-filled compression bulb at sill
- Multiple rows of mylar fin weatherstrip
- Integral lift rail
- Bio-Maxx composite sweep locks
- Recessed tilt latches
- Stainless steel constant force balances
- Metal drop in pivot cam
- Tilt in, lift out sash
- Aluminum screen frame
- BetterVue screen mesh
- 3/4" Insulated glass unit
- Intercept Spacer system
- Tape Glazed
- Limited Lifetime Warranty
- White or Tan Vinyl
- Made in USA with more than 90% domestic content

Made in USA



Size Limits

	Width	Height	UI*
Minimum	11 3/4"	21 1/2"	34
Maximum	52"	100"	150

*United Inches = Width + Height

Performance

Thermal Performance	NFRC	A9904.02-116-45		
(no grids/ grids)	U-value	SHGC	VT	CR
Clear/Clear	.48	.64/.58	.66/.59	43
IntelliGlass 7036 LE/Argon	.31	.30/.27	.57/.51	56
IntelliGlass X Solar LE/Argon	.30	.26/.23	.51/.45	55

Structural Performance	83327.01-501.-47
Air Infiltration@ 25MPH	.18 cfm/ft ²
Water Penetration	6.9 psf
Structural Pressure	+/- 37.62 psf
Equivalent Wind	122 mph

PRODUCT RATING: R-PG25

Cross Sections

